

Julabo

THE TEMPERATURE CONTROL COMPANY

MAGIO™

Refrigerated and heating circulators



ENGLISH



MAGIO™. The best for your laboratory.

From research institutes to industrial companies, laboratories around the world need high performance circulators for challenging temperature applications. The high-end circulators in the MAGIO range have been specially developed by JULABO with pioneering technologies for these requirements and are manufactured to the highest quality standards in Germany.

With the MAGIO range we offer our customers high-end devices in the highest performance class for the working temperature range from -50 °C to +300 °C. On all models, the wetted parts are made from stainless steel. In combination with high-performance pumps, this makes the circulators particularly suitable for challenging external applications. The high resolution touch display guarantees simple, intuitive operation and optimal visibility of all relevant functions. Thanks to the proven JULABO premium quality, all models meet the highest standards in terms of precision, reliability, and functionality.

With a wide selection of accessories, all MAGIO instruments can be tailored to customer-specific applications in a modular and individual way. Modern interfaces and an integrated programmer complete the intelligent design of the MAGIO models.



MAGIO – the laboratory circulators

Advantages at a glance 4

Refrigerated circulators 6

Heating circulators 10

Accessories 16

Technical specifications 26




MAGIO.

The advantages at a glance.



Everything made of stainless steel.

The highest level of quality and material compatibility. All parts that come into contact with the medium are made of stainless steel.



Many interfaces.

Simple remote control, data management and integration into process structures. USB, RS232 and ethernet are permanently integrated.



Touch display. Perfect control.

A high resolution TFT touch display means that the operator always has an eye on all values and functions. The intuitive menu structure makes easy control possible.



Multilingual.

The complete menu navigation is available in multiple languages.




Maximum safety.

The classification III according to DIN12876-1 makes safe operation possible, even with flammable liquids. Automatic shut-off in case of high temperature or low liquid level.



Programmer. Integrated.

The integrated programmer allows automatic running of temperature time profiles.



Filling level. Monitored.

Level indicator of the bath medium on the display.



Environmentally friendly.

Units with this symbol work with environmentally friendly, natural refrigerants.



Energy-saving

The high-quality insulation of all relevant components saves energy.



Temperature. Under control.

External Pt100 sensor connection for highly precise measurement and control directly in the external application.



Power PUMP

JULABO exclusive

Powerful pump.

The integrated pressure/suction pump with performance values of 0.92 and -0.4 bar is the strongest in its class and is continuously adjustable.



Analog I/O.

Analog interfaces for integration into process control systems (accessories).



Process stability.

Early visual and acoustic notification of critical conditions increases process safety.



Process. Under control.

Full supervision of the control dynamics. Access to all important control parameters for individual process optimisation.



Highest measuring accuracy.

'Absolute Temperature Calibration' for manual compensation of a temperature difference, 10-point calibration.



Intelligent temperature control.

Intelligent Cascade Control – automatic and self-optimizing adjustment of the PID control parameters with external constancy of ± 0.05 °C.



Condensation protection.

Superb design solution. Integrated ventilation directs air over the bath lid and minimizes condensation.



Stable. Mobile.

Perfect stability thanks to rubber feet. Additionally integrated casters means that even the large, high-performance JULABO circulators are easy to handle.



Connection. Easy.

Inclined pump connections (M16×1) facilitate the connection of applications. Each unit includes 2 barbed fittings of 8/12 mm diameter each.



Space saving.

Place your JULABO circulators right next to an application, another unit, or wall. This saves space. A lack of vents and connections on the side makes it possible.



Refrigerated circulators



Refrigerated/heating circulators of the MAGIO range are perfect for precise, reliable temperature control of demanding external applications. The devices are designed to surpass the requirements of laboratories and institutions around the world with their application of modern technology and high quality.



Refrigerated circulators

MAGIO MS refrigerated/heating circulators


for working temperatures from -50 °C to +200 °C

As with all circulators from the MAGIO range, the refrigerated circulators stand out thanks to their premium quality, high performance and intuitive operation. The devices offer extra strong pressure and suction pumps, thus fulfilling the highest demands for temperature control of external applications. Whether in basic research, material testing or technical systems – the MAGIO refrigerated circulators offer high-tech solutions for high customer requirements.

- Ideal for demanding external applications
- Simple control of complex applications
- Continuously adjustable, extremely powerful pressure/suction pump
- Flow rate 16 ... 31 l/min, pressure 0.24 ... 0.92 bar, suction 0.03 ... 0.4 bar
- Large, high-resolution TFT touch display with multilingual user interface
- Parts being in contact with the medium made of stainless steel
- Integrated programmer
- External Pt100 sensor connection
- USB interface
- RS232 interface
- Ethernet interface
- Analog interfaces (accessories)
- Classification III according to DIN 12876-1

Pump capacity


Bath fluid: Water



■ lowest pump speed
■ highest pump speed

Cool-down time


Bath fluid: Ethanol



■ 449F

Heat-up time


Bath fluid: Thermal



■ 310F/450F ■ 449F ■ 600F/1000F/W
■ 601F ■ 900F

Cool-down time

Bath fluid: Ethanol



■ 310F ■ 601F ■ 900F
■ 450F ■ 600F ■ 1000F/W



MAGIO™ MS-310F

Order No. 9 032 713.N1*

| | | | |
|--|---------------------------|--------|--------|
| Working temperature range °C | -30 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 0.26 | 0.21 | 0.17 |
| | -20 °C | -30 °C | -40 °C |
| | 0.10 | 0.01 | - |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 13 × 15 / 15 | | |
| Filling volume min. liters | 3 ... 4 | | |
| Dimensions cm | W × L × H 23 × 40 × 65 | | |



MAGIO™ MS-601F

Order No. 9 032 705

| | | | |
|--|---------------------------|--------|--------|
| Working temperature range °C | -35 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 0.6 | 0.44 | 0.27 |
| | -20 °C | -30 °C | -40 °C |
| | 0.16 | 0.04 | - |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 22 × 15 / 20 | | |
| Filling volume min. liters | 8 ... 10 | | |
| Dimensions cm | W × L × H 33 × 47 × 74 | | |



MAGIO™ MS-450F

| | | | |
|--|---------------------------|---------------|---------------|
| Order No. | 9 032 714.N1* | | |
| Working temperature range °C | -30 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 0.4 | 0.33 | 0.24 |
| | -20 °C | -30 °C | -40 °C |
| | 0.12 | 0.01 | - |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 13 × 15 / 15 | | |
| Filling volume min. liters | 3 ... 4 | | |
| Dimensions cm | W × L × H 23 × 40 × 65 | | |



MAGIO™ MS-449F

| | | | |
|--|---------------------------|---------------|---------------|
| Order No. | 9 032 716.N1 | | |
| Working temperature range °C | -30 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 0.4 | 0.31 | 0.24 |
| | -20 °C | -30 °C | -40 °C |
| | 0.19 | 0.05 | - |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 28 × 35 / 20 | | |
| Filling volume min. liters | 21 ... 30 | | |
| Dimensions cm | W × L × H 37 × 59 × 69 | | |



MAGIO™ MS-600F

| | | | |
|--|---------------------------|---------------|---------------|
| Order No. | 9 032 704 | | |
| Working temperature range °C | -35 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 0.6 | 0.44 | 0.27 |
| | -20 °C | -30 °C | -40 °C |
| | 0.16 | 0.04 | - |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 22 × 15 / 15 | | |
| Filling volume min. liters | 5 ... 7.5 | | |
| Dimensions cm | W × L × H 33 × 47 × 69 | | |



MAGIO™ MS-900F

| | | | |
|--|---------------------------|---------------|---------------|
| Order No. | 9 032 706 | | |
| Working temperature range °C | -38 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 0.9 | 0.8 | 0.52 |
| | -20 °C | -30 °C | -40 °C |
| | 0.31 | 0.11 | - |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 26 × 35 / 20 | | |
| Filling volume min. liters | 21 ... 30 | | |
| Dimensions cm | W × L × H 39 × 62 × 75 | | |



MAGIO™ MS-1000F

| | | | |
|--|---------------------------|---------------|---------------|
| Order No. | 9 032 707 | | |
| Working temperature range °C | -50 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 1 | 0.96 | 0.7 |
| | -20 °C | -30 °C | -40 °C |
| | 0.51 | 0.25 | 0.11 |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 18 × 13 / 15 | | |
| Filling volume min. liters | 5 ... 7.5 | | |
| Dimensions cm | W × L × H 42 × 49 × 74 | | |



MAGIO™ MS-1000FW

| | | | |
|--|---------------------------|---------------|---------------|
| Order No. | 9 032 727 | | |
| Working temperature range °C | -50 ... +200 | | |
| Temperature stability °C | ± 0.01 | | |
| Heating capacity kW | 2 | | |
| Cooling capacity kW (Medium: Ethanol) | +20 °C | 0 °C | -10 °C |
| | 1 | 0.96 | 0.7 |
| | -20 °C | -30 °C | -40 °C |
| | 0.51 | 0.25 | 0.11 |
| Flow rate l/min | 16 ... 31 | | |
| Pressure bar | 0.24 ... 0.92 | | |
| Suction bar | 0.03 ... 0.4 | | |
| Bath opening / bath depth cm | W × L / D 18 × 13 / 15 | | |
| Filling volume min. liters | 5 ... 7.5 | | |
| Dimensions cm | W × L × H 42 × 49 × 74 | | |

*also available with synthetic refrigerant (replace .N1 with .S1 in order number)

MAGIO **heating circulators** offer professional technology for demanding tasks in the laboratory or industry. The wide range of models provide a flexible solution for any application.



Heating circulators



Heating circulators

MAGIO MS and MX bridge mounted circulators


for working temperatures from +20 °C to +300 °C

MAGIO bridge mounted circulators combine high temperature performance with maximum flexibility. The adjustable bridge allows the circulators to be used with bath tanks up to a filling volume of 100 liters.

- Immersion depth of 200 mm (MX-Z) and 150 mm (MS-Z)
- Strong heating capacity of 3 kW (MX-Z) and 2 kW (MS-Z)
- Extendable stainless steel bridge from 33 to 68 cm
- Ideal for demanding external applications
- Simple control of complex applications
- Continuously adjustable, extremely powerful pressure/suction pump
- Flow rate 16 ... 31 l/min, pressure 0.24 ... 0.92 bar, suction 0.03 ... 0.4 bar
- Large, high-resolution TFT touch display with multilingual user interface
- Parts being in contact with the medium made of stainless steel
- Integrated programmer
- External Pt100 sensor connection
- USB interface
- RS232 interface
- Ethernet interface
- Analog interfaces (accessories)
- Classification III according to DIN 12876-1

Pump capacity

Medium: Water



■ lowest pump speed
■ highest pump speed





MAGIO™ MS-Z

| | |
|--|---------------------------|
| Order No. | 9 032 201 |
| Working temperature range °C ¹⁾ | +20 ... +300 |
| Temperature stability °C | ± 0.01 |
| Heating capacity kW | 2 |
| Flow rate l/min | 16 ... 31 |
| Pressure bar | 0.24 ... 0.92 |
| Suction bar | 0.03 ... 0.4 |
| Dimensions cm | W × L × H 34 × 19 × 36 |

MAGIO™ MX-Z

| | |
|--|---------------------------|
| Order No. | 9 033 201 |
| Working temperature range °C ¹⁾ | +20 ... +300 |
| Temperature stability °C | ± 0.01 |
| Heating capacity kW | 3 |
| Flow rate l/min | 16 ... 31 |
| Pressure bar | 0.24 ... 0.92 |
| Suction bar | 0.03 ... 0.4 |
| Dimensions cm | W × L × H 34 × 19 × 41 |



High resolution TFT touch display

The modern TFT touch display gives you all the important information at a glance. Three large, predefined main screens clearly display data and graphics with various application priorities. Menu navigation is self-explanatory, arranged by relevance to daily operations and easy to operate with the touch of a finger. The in-built help function provides detailed support in case of additional questions.

¹⁾For applications near or below ambient temperature: use a cooling coil or JULABO immersion cooler.

Heating circulators

MAGIO MS and MX heating circulators

for working temperatures from +20 °C to +300 °C

MAGIO heating circulators feature professional technology for the most demanding applications. The systems have been designed to provide precise temperature control to external applications. However samples can also be temperature-controlled inside the high-quality insulated, closed bath tank.

- Models for internal and external applications from 3 to 26 liters
- Ideal for demanding external applications
- Simple control of complex applications
- Continuously adjustable, extremely powerful pressure/suction pump
- Large color TFT touch display, multi-lingual user interface
- Stainless steel parts in contact with the medium
- Flow rate 16 ... 31 l/min, pressure 0.24 ... 0.92 bar, suction 0.03 ... 0.4 bar
- Integrated programmer
- External Pt100 sensor connection
- USB interface
- RS232 interface
- Ethernet interface
- Analog interfaces (accessories)
- Classification III according to DIN 12876-1
- High-quality thermal insulation of the bath tanks
- Built-in drain tap for easy and safe drainage

We offer a comprehensive range of accessories to adapt the MAGIO heating circulators to your individual application (racks, tubing, adapters, and more).



MAGIO™ MS-BC4

| | |
|--|---------------------------|
| Order No. | 9 032 504 |
| Working temperature range °C ¹⁾ | +20 ... +300 |
| Temperature stability °C | ± 0.01 |
| Heating capacity kW | 2 |
| Flow rate l/min | 16 ... 31 |
| Pressure bar | 0.24 ... 0.92 |
| Suction bar | 0.03 ... 0.4 |
| Bath opening / bath depth cm | W × L / D 13 × 15 × 15 |
| Filling volume liters | 3 ... 4.5 |
| Dimensions cm | W × L × H 23 × 41 × 42 |





MAGIO™ MX-BC6

| | |
|--|---------------------------|
| Order No. | 9 033 506 |
| Working temperature range °C ¹⁾ | +20 ... +300 |
| Temperature stability °C | ± 0.01 |
| Heating capacity kW | 3 |
| Flow rate l/min | 16 ... 31 |
| Pressure bar | 0.24 ... 0.92 |
| Suction bar | 0.03 ... 0.4 |
| Bath opening/bath depth cm | W × L / D 13 × 15 × 20 |
| Filling volume liters | 4.5 ... 6 |
| Dimensions cm | W × L × H 24 × 44 × 47 |

MAGIO™ MX-BC12


| | |
|--|---------------------------|
| Order No. | 9 033 512 |
| Working temperature range °C ¹⁾ | +20 ... +300 |
| Temperature stability °C | ± 0.01 |
| Heating capacity kW | 3 |
| Flow rate l/min | 16 ... 31 |
| Pressure bar | 0.24 ... 0.92 |
| Suction bar | 0.03 ... 0.4 |
| Bath opening/bath depth cm | W × L / D 22 × 15 × 20 |
| Filling volume liters | 8.5 ... 12 |
| Dimensions cm | W × L × H 33 × 49 × 47 |

MAGIO™ MX-BC26

| | |
|--|---------------------------|
| Order No. | 9 033 526 |
| Working temperature range °C ¹⁾ | +20 ... +300 |
| Temperature stability °C | ± 0.01 |
| Heating capacity kW | 3 |
| Flow rate l/min | 16 ... 31 |
| Pressure bar | 0.24 ... 0.92 |
| Suction bar | 0.03 ... 0.4 |
| Bath opening/bath depth cm | W × L / D 26 × 35 × 20 |
| Filling volume liters | 19 ... 26 |
| Dimensions cm | W × L × H 39 × 62 × 48 |

Heat-up time


Medium: Thermal



BC4 BC6
BC12 BC26

Pump capacity

Medium: Water



lowest pump speed
highest pump speed

¹⁾ For applications near or below ambient temperature: use a cooling coil or JULABO immersion cooler.


JULABO Thermal bathfluid

JULABO Thermal bath fluids have been carefully selected after long-term testing. They are ideally suited for all temperature control applications guaranteeing safe and reliable operation. Choosing the proper bath fluid is critical for high performance temperature control. The viscosity and heat conductivity of the Thermal fluids are specifically selected for use with JULABO MAGIO temperature control instruments.

Advantages

- Wide temperature ranges
- Low viscosity
- High stability
- Good heat conductivity
- Minimum odor
- Long fluid life

Working temperature ranges

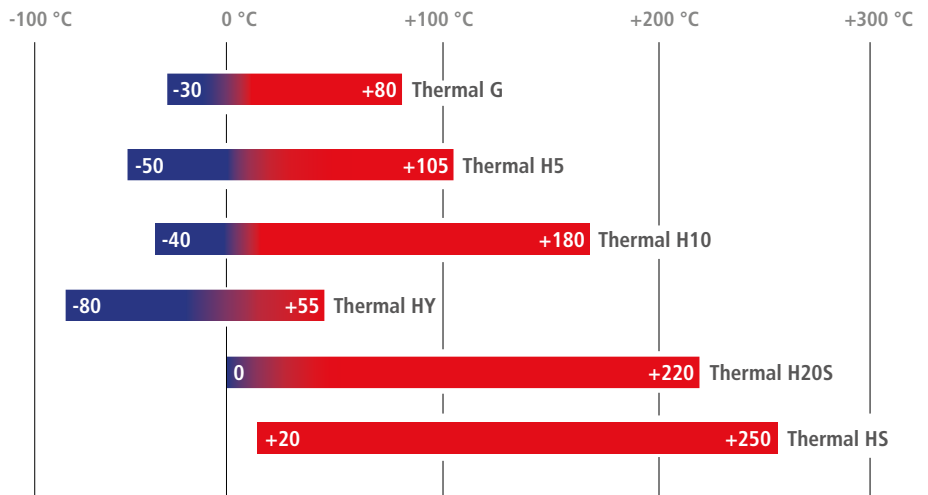

Makes routine laboratory work easier

JULABO Thermal bath fluids are delivered in containers with a handy drain tap.

JULABO Thermal bath fluids based on silicone ...

... are chemically inert substances which do not affect metals like iron, copper, zinc, aluminum, chrome or nickel. Compared to other fluids, JULABO Thermal fluids have an extraordinarily low electrical conductivity. When properly stored, the fluids will last for 12 months and longer as they are not susceptible to climatic influences.

JULABO Thermal bath fluids based on water-glycol ...

... (monoethylenglycol with anti-corrosion additives) have excellent thermal characteristics and a low viscosity. In addition, they provide anti-freeze protection, i.e. they can be applied at temperatures below the freezing point of water.

More information about JULABO Thermal bath fluids ...

... in our brochure 'Thermal Bath Fluids' at www.julabo.com.





Thermal G

Order No. 5 liters 8 940 125

Order No. 10 liters 8 940 124

Working temperature range °C -30 ... +80

Flash point °C -

Fire point °C -

Viscosity, (kinematic at +20 °C) mm²/s 4.13 mPas

Density (at +20 °C) g/cm³ 1.0681 g/cm³

Pour point °C -44

Boiling point °C +109

Ignition temperature °C +109

Color light yellow



Thermal H5

Order No. 5 liters 8 940 107

Order No. 10 liters 8 940 106

Working temperature range °C -50 ... +105

Flash point °C >+120

Fire point °C +142

Viscosity, (kinematic at +20 °C) mm²/s 5.66

Density (at +20 °C) g/cm³ 0.92

Pour point °C -100

Boiling point °C +288

Ignition temperature °C +288

Color clear



Thermal H10

Order No. 5 liters 8 940 115

Order No. 10 liters 8 940 114

Working temperature range °C -40 ... +180

Flash point °C >+165

Fire point °C +220

Viscosity, (kinematic at +20 °C) mm²/s 10

Density (at +20 °C) g/cm³ 0.93

Pour point °C <-60

Boiling point °C +288

Ignition temperature °C +288

Color clear



Thermal HL30

Order No. 5 liters 8 940 139

Order No. 10 liters 8 940 138

Working temperature range °C -30 ... +90

Flash point °C -

Fire point °C -

Viscosity, (kinematic at +20 °C) mm²/s 4.13mPas

Density (at +20 °C) g/cm³ 1.0681

Pour point °C -44

Boiling point °C +109

Ignition temperature °C +109

Color light yellow



Thermal H20S

Order No. 5 liters 8 940 109

Order No. 10 liters 8 940 108

Working temperature range °C 0 ... +220

Flash point °C >+200

Fire point °C +264

Viscosity, (kinematic at +20 °C) mm²/s 20

Density (at +20 °C) g/cm³ 0.95

Pour point °C -70

Boiling point °C +424

Ignition temperature °C +424

Color light brown



Thermal HS

Order No. 5 liters 8 940 103

Order No. 10 liters 8 940 102

Working temperature range °C +20 ... +250

Flash point °C >+250

Fire point °C +360

Viscosity, (kinematic at +20 °C) mm²/s 50 mm²/s

Density (at +20 °C) g/cm³ 0.97 g/cm³

Pour point °C <-60

Boiling point °C -

Ignition temperature °C -

Color light brown

Accessories



Water bath protective media to prevent the formation of algae and bacteria and descaling agent

| Order No. | Description | Suitable for |
|-----------|--------------------------------------|--------------|
| 8 940 006 | Aqua Stabil, 6 bottles, 100 ml each | MAGIO |
| 8 940 012 | Aqua Stabil, 12 bottles, 100 ml each | MAGIO |
| 9 940 200 | Descaling agent, 1 liter | MAGIO |




Extendable bridge

| Order No. | Description | Suitable for |
|-----------|-------------------------------|--------------|
| 9 970 201 | adjustable from 330 to 680 mm | MAGIO |




Hollow balls to reduce heat loss, evaporation, oxygen input, odors, and action of light

| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 970 010 | Hollow balls, polypropylene®, 20 mm Ø, 1000 pcs (up to +100 °C, for water only) | MAGIO |



Test tube racks made of stainless steel, up to +150 °C

| Order No. | Description | Suitable for |
|-----------|--|-------------------------------|
| 9 970 320 | Test tube rack for 30 tubes 100 × 17 mm | MS-BC4, MX-BC6, MS-310F, 450F |
| 9 970 323 | Test tube rack for 10 falcon tubes 50 ml | MS-BC4, MX-BC6, MS-310F, 450F |



Adjustable platforms

| Order No. | Description | Suitable for |
|-----------|--------------------------------------|---------------------------|
| 9 970 506 | Immersion-height adjustable platform | MS-449F, MS-900F, MX-BC26 |



Booster Heater

| Order No. | Description | Suitable for |
|-----------|---------------------|---------------------------------|
| 9 810 007 | Booster Heater 6 kW | BC12, 600F, 601F, 1000F, 1000FW |



Heat exchangers/cooling installations

| Order No. | Description | Suitable for |
|-----------|---------------------------------------|--|
| 9 970 240 | Bath lid with built-in heat exchanger | MS-BC4, MX-BC6, MS-310F, MS-450F |
| 9 970 242 | Bath lid with built-in heat exchanger | MX-BC12 MS-600F, MS-601F, MS-1000F, MS-1000FW |



Lockable bath cover/condensation trap

| | | |
|-----------|---------------------------------|---|
| 9 970 243 | Lockable bath cover | MS-600F, MS-601F, MS-1000F, MS-1000FW, MX-BC12 |
| 9 970 700 | Condensation trap with bath lid | MS-600F, MS-601F, MS-1000F, MS-1000FW |



Viton® tubing (-35 °C ... +200 °C)

| Order No. | Description | Suitable for |
|-----------|---------------|--------------|
| 8 930 108 | 1 m, 8 mm ID | MAGIO |
| 8 930 110 | 1 m, 10 mm ID | MAGIO |
| 8 930 112 | 1 m, 12 mm ID | MAGIO |




Silicon tubing (-50 °C ... +180 °C)

| Order No. | Description | Suitable for |
|-----------|---------------|--------------|
| 8 930 120 | 1 m, 8 mm ID | MAGIO |
| 8 930 122 | 1 m, 12 mm ID | MAGIO |



Accessories



PTFE tubing (-60 °C ... +180 °C)

| Order No. | Description | Suitable for |
|-----------|---------------|--------------|
| 8 930 140 | 1 m, 8 mm ID | MAGIO |
| 8 930 142 | 1 m, 12 mm ID | MAGIO |



Tubing insulation (-50 °C ... +100 °C)

| Order No. | Description | Suitable for |
|-----------|----------------------------|---------------------|
| 8 930 410 | 1 m, for tubing 8-10 mm ID | CR® / Viton® tubing |
| 8 930 412 | 1 m, for tubing 12 mm ID | CR® / Viton® tubing |



Tube clamps

| Order No. | Description | Suitable for |
|-----------|-----------------------|---------------------------------|
| 8 970 480 | 2 tube clamps, size 1 | CR® / Viton® tubing 8 mm ID |
| 8 970 481 | 2 tube clamps, size 2 | CR® / Viton® tubing 10-12 mm ID |



Metal tubing flexible, triple insulated, (-100 °C ... +350 °C)

| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 930 209 | 0.5 m metal tubing, 2 fittings M16×1 female | MAGIO |
| 8 930 216 | 2.0 m Metal tubing, 2 connectors M16×1 female | MAGIO |
| 8 930 211 | 1.5 m metal tubing, 2 fittings M16×1 female | MAGIO |
| 8 930 214 | 3.0 m metal tubing, 2 fittings M16×1 female | MAGIO |



Metal tubing flexible, insulated, (-50 °C ... +200 °C)

| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 930 220 | 0.5 m metal tubing, 2 fittings M16×1 female | MAGIO |
| 8 930 221 | 1 m metal tubing, 2 fittings M16×1 female | MAGIO |
| 8 930 222 | 1.5 m metal tubing, 2 fittings M16×1 female | MAGIO |
| 8 930 223 | 3 m metal tubing, 2 fittings M16×1 female | MAGIO |
| 8 930 224 | 2 m metal tubing, 2 fittings M16×1 female | MAGIO |



Connectors and adapters

| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 970 446 | 2 barbed fittings for tubing 8 mm ID | MAGIO |
| 8 970 447 | 2 barbed fittings for tubing 10 mm ID | MAGIO |
| 8 970 445 | 2 barbed fittings for tubing 12 mm ID | MAGIO |
| 8 970 443 | 1 adapter M16×1 male to M16×1 male | MAGIO |
| 8 970 490 | 2 collar nuts M16×1 female | MAGIO |
| 8 970 442 | 2 elbow fittings 90°, M16×1 female/male | MAGIO |



| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 890 024 | 2 adapters M16×1 female to M16×1 female | MAGIO |
| 8 970 448 | 2 elbow fittings 90°, M16×1 female/male, side length 1 × 54 mm / 1 × 120 mm | MAGIO |
| 8 890 004 | 2 adapters M16×1 female to NPT 1/4" male | MAGIO |
| 8 890 005 | 2 adapters M16×1 female to NPT 1/4" female | MAGIO |
| 8 890 006 | 2 adapters M16×1 female to NPT 3/8" male | MAGIO |
| 8 890 007 | 2 adapters M16×1 female to NPT 3/8" female | MAGIO |
| 8 890 008 | 2 adapters M16×1 female to NPT 1/2" male | MAGIO |
| 8 890 009 | 2 adapters M16×1 female to NPT 1/2" female | MAGIO |
| 8 890 010 | 2 adapters M16×1 male to NPT 1/4" female | MAGIO |
| 8 891 008 | 1 adapter M16×1 male to BSP 1/2" female | MAGIO |
| 8 891 009 | 1 adapter M16×1 male to BSP 3/4" female | MAGIO |
| 8 890 011 | 2 adapters M16×1 female to tube 1/4" male | MAGIO |
| 8 890 012 | 2 adapters M16×1 female to tube 3/8" male | MAGIO |
| 8 890 013 | 2 adapters M16×1 female to tube 1/2" male | MAGIO |



Shut-off valves for loop circuit

| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 970 456 | Shut-off valve (-10 °C ... +100 °C), M16×1 | MAGIO |
| 8 970 457 | Shut-off valve (-30 °C ... +200 °C), M16×1 | MAGIO |
| 8 980 701 | Solenoid valve set (2 pieces, max. +100 °C) | MAGIO |
| 8 970 850 | Shut-off valve (-60 °C ... +200 °C), M16×1 | MAGIO |



Self-sealing coupling

| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 980 710 | Self-sealing coupling (-20 °C ... +200°C) Connection M16×1 male Connection temperature: +20 °C Laser engraving with temperature range Materials: Stainless steel Seal: FKM | MAGIO |
| 8 980 711 | Self-sealing adapter (-20 °C ... +200°C), Connection M16×1 male Connection temperature: +20 °C Laser engraving with temperature range Materials: Stainless steel Seal: FKM | MAGIO |
| 8 980 714 | Self-sealing coupling (-45 °C ... +220°C), Connection M16×1 male Connection temperature: +20 °C, Laser engraving with temperature range Materials: Stainless steel 1.4404/1.4571 or equivalent Seal: FFKM | MAGIO |
| 8 980 715 | Self-sealing adapter (-45 °C ... +220°C), Connection M16×1 male Connection temperature: +20 °C Materials: Stainless steel 1.4404/1.4571 or equivalent Seal: FFKM | MAGIO |
| 8 980 720 | Self-sealing coupling (-45 °C ... +220°C), Connection male Connection temperature: +20 °C, Laser engraving with temperature range Materials: Stainless steel 1.4404/1.4571 or equivalent Seal: FFKM Double-sided shut-off clean-break technology (low-loss and low-inclusion operation) | MAGIO |
| 8 980 721 | Self-sealing adapter (-45 °C ... +220°C), Connection M16×1 male Connection temperature: +20 °C, Laser engraving with temperature range Materials: Stainless steel 1.4404/1.4571 or equivalent Seal: FFKM Double-sided shut-off clean-break technology (low-loss and low-inclusion operation) | MAGIO |



Accessories



Distributor

| Order No. | Description | Suitable for |
|-----------|--|-----------------|
| 8 970 470 | Twin distributing adapter with barbed fittings | Tubing 8 mm ID |
| 8 970 471 | Twin distributing adapter with barbed fittings | Tubing 12 mm ID |
| 8 970 472 | Twin distributing adapter with barbed fittings | Tubing 10 mm ID |
| 8 970 473 | Twin distributing adapter M16×1 female to 2 × M16×1 male | MAGIO |



External Pt100 sensor

| Order No. | Description | Suitable for |
|-----------|--|--------------|
| 8 981 003 | External Pt100 sensor, 200 × 6 mm ø, stainless steel, 1.5 m connecting cable | MAGIO |
| 8 981 006 | External Pt100 sensor, 20 × 2 mm ø, stainless steel, 1.5 m connecting cable | MAGIO |
| 8 981 010 | External Pt100 sensor, 300 × 6 mm ø, stainless steel, 1.5 m connecting cable | MAGIO |
| 8 981 013 | External Pt100 sensor, 600 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable | MAGIO |
| 8 981 014 | External Pt100 sensor, 1200 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable | MAGIO |
| 8 981 015 | External Pt100 sensor, 300 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable | MAGIO |
| 8 981 016 | External Pt100 sensor, 900 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable | MAGIO |
| 8 981 017 | External Pt100 sensor, 200 × 6 mm ø, stainless steel/PTFE, 3 m connecting cable | MAGIO |
| 8 981 020 | M+R in-line Pt100 sensor with external Pt100 sensor, 1.5 m connecting cable | MAGIO |
| 8 981 103 | Extension cable 3.5 m for Pt100 sensor. With Lemosa connectors | MAGIO |



Connection plugs

| Order No. | Description | Suitable for |
|-----------|----------------------------|--------------|
| 8 980 131 | External Pt100 sensor plug | MAGIO |
| 8 980 133 | Standby plug, 3 pin | MAGIO |
| 8 980 135 | Alarm plug 5 pin | MAGIO |
| 8 980 136 | REG EPROG-plug 6 pin | MAGIO |
| 8 980 137 | Stakei plug | MAGIO |



Castor platform

| Order No. | Description | Suitable for |
|-----------|-----------------|--------------|
| 8 910 040 | Castor platform | MAGIO |

Software and hardware for instrument control, data recording and visualization, interfaces



| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 901 102 | EasyTEMP Software (free of charge at www.julabo.com) | MAGIO |
| 8 901 105 | EasyTEMP Professional Software, incl. USB dongle | MAGIO |
| 9 900 100 | Electronic module with analog connectors | MAGIO |
| 9 900 110 | 2 m, USB interface cable, type A-B | MAGIO |
| 9 900 112 | 5 m, USB 2.0 repeater extension cable | MAGIO |
| 9 900 114 | 10 m, USB 2.0 repeater extension cable | MAGIO |
| 8 980 073 | 2.5 m, RS232 interface cable with 9-pin plug / 9 pin socket | MAGIO |
| 8 980 074 | 5 m, RS232 interface cable with 9-pin plug / 9 pin socket | MAGIO |
| 8 980 075 | 3 m, RS232 interface cable with 9-pin plug / 9-pin socket | MAGIO |
| 8 980 031 | Ethernet / RS232 interface converter | MAGIO |
| 8 980 032 | Ethernet / RS232 interface converter for up to 4 JULABO instruments | MAGIO |
| 8 980 033 | Ethernet / RS232 interface converter for up to 8 JULABO | MAGIO |
| 8 900 020 | Profibus DP interface | MAGIO |
| 8 980 036 | ATEX Tablet Agile X | MAGIO |

Calibration and Manufacturer's Certificates



| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 8 902 901 | 1-point manufacturer's calibration certificate for circulators | MAGIO |
| 8 902 903 | 3-point manufacturer's calibration certificate for circulators | MAGIO |
| 8 902 905 | 5-point manufacturer's calibration certificate for circulators | MAGIO |
| 8 903 025 | Manufacturer's Testing Certificate for JULABO Units, Category 2 | MAGIO |

IQ/OQ documentation



| Order No. | Description | Suitable for |
|-----------|---------------------------------|--------------|
| 2 310 120 | IQ/OQ Documentation, Category 2 | MAGIO |

Maintenance



| Order No. | Description | Suitable for |
|-----------|---|--------------|
| 2 350 102 | Maintenance JULABO Units, Category 2 Maintenance includes preventive measures that help to maintain functionality, to minimize downtime as well as costs. A JULABO maintenance comprises works such as visual inspection, cleaning, functional test and includes a maintenance report. | MAGIO |

The **Julabo** advantages at a glance.


JULABO temperature control solutions – high-precision and speed

JULABO products include high-quality temperature control solutions to cover the temperature range -95 °C to +400 °C.




Refrigerated circulators

JULABO refrigerated circulators are suitable for internal and external applications and can be used within the temperature range -95 °C to +200 °C.



Water baths and shaking water baths

JULABO water baths and shaking water baths can be used for a variety of applications within the temperature range +18 °C to +99.9 °C.



Heating circulators

Heating circulators are available in various designs including heating immersion circulators, heating circulators with open bath, and heating circulators to cover a temperature range from +20 °C to +300 °C.




Additional products

In addition, the JULABO product portfolio offers instruments for special requirements such as calibration baths, beer forcing test baths, immersion / flow-through coolers and temperature controllers.



Highly dynamic temperature control systems

The highly dynamic temperature control systems from JULABO can be used for demanding temperature applications ranging from -93 °C to +400 °C. The PRESTO series offers unique high-performance specifications to meet these requirements.




Wireless communication & software solutions

JULABO facilitates the automation of applications. The temperature control instruments can be comfortably controlled and monitored via PC.



Recirculating coolers

The high degree of efficiency of JULABO recirculating coolers makes them an environmentally-friendly and economic alternative to tap water cooling in the temperature range -25 °C to +130 °C.



Accessories

An extensive range of accessories allows for adaptation of JULABO products for research and industry use.

Comprehensive service and on-site support

JULABO takes pride in offering customers expert advice for pairing the proper JULABO temperature control solution to their specific application. JULABO service and support options include installation and calibration, equipment qualification documentation and application training. These invaluable services ensure customer confidence in the operation and maintenance of any JULABO unit.

Custom requirements - custom products

JULABO's wide range of products provide a solution for almost any application. If no standard product can be used for a specific requirement, our specialists will work out a custom solution together with you.



JULABO. Quality.

Highest quality standards to ensure a long product life.



Green technology.

Deliberately engineered with environmentally friendly materials and technologies.



Satisfied customers.

11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



100 % checked.

100 % testing. 100 % quality. Every JULABO product is shipped to customers after a successful final inspection.



Quick start.

Individual JULABO consultation and detailed manuals get your instruments up and running on site.



Services 24/7.

Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies and more at www.julabo.com.

Technical specifications

| Model | Order No. | Working temperature range °C | Display / display resolution | Temperature control | Temperature stability °C | Heating capacity kW | Cooling refrigeration unit | Classification according to DIN 12876-1 | Permissible ambient temperature °C |
|-----------|---------------|------------------------------|------------------------------|---------------------|--------------------------|---------------------|----------------------------|---|------------------------------------|
| MS-310F | 9 032 713.N1* | -30 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Air | III (FL) | +10 ... +40 |
| MS-450F | 9 032 714.N1* | -30 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Air | III (FL) | +10 ... +40 |
| MS-449F | 9 032 716.N1 | -30 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Air | III (FL) | +10 ... +40 |
| MS-600F | 9 032 704 | -35 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Air | III (FL) | +10 ... +40 |
| MS-601F | 9 032 705 | -35 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Air | III (FL) | +10 ... +40 |
| MS-900F | 9 032 706 | -38 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Air | III (FL) | +10 ... +40 |
| MS-1000F | 9 032 707 | -50 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Air | III (FL) | +10 ... +40 |
| MS-1000FW | 9 032 727 | -50 ... +200 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | Water | III (FL) | +10 ... +40 |
| MS-Z | 9 032 201 | +20 ... +300 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | - | III (FL) | +10 ... +40 |
| MX-Z | 9 033 201 | +20 ... +300 | 7" TFT/0.01 | ICC | ± 0.01 | 3 | - | III (FL) | +10 ... +40 |
| MS-BC4 | 9 032 504 | +20 ... +300 | 7" TFT/0.01 | ICC | ± 0.01 | 2 | - | III (FL) | +10 ... +40 |
| MX-BC6 | 9 033 506 | +20 ... +300 | 7" TFT/0.01 | ICC | ± 0.01 | 3 | - | III (FL) | +10 ... +40 |
| MX-BC12 | 9 033 512 | +20 ... +300 | 7" TFT/0.01 | ICC | ± 0.01 | 3 | - | III (FL) | +10 ... +40 |
| MX-BC26 | 9 033 526 | +20 ... +300 | 7" TFT/0.01 | ICC | ± 0.01 | 3 | - | III (FL) | +10 ... +40 |

*also available with synthetic refrigerant (replace .N1 with .S1 in order number)

| Model | Cooling capacity (kW) at bath temperature (°C) (Bath fluid: Ethanol) | | | | | | Type ⊕ Pressure / suction pump | Pump | | | Pump connection thread male | Filling volume liters | Mains connection V/Hz/A |
|-----------|--|------|------|------|------|------|-----------------------------------|-------------------------|-----------------|----------------|--------------------------------|--------------------------|----------------------------|
| | +20 | 0 | -10 | -20 | -30 | -40 | | Flow rate liters/min | Pressure bar | Suction bar | | | |
| MS-310F | 0.26 | 0.21 | 0.17 | 0.10 | 0.01 | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 3 ... 4 | 230/50/14 |
| MS-450F | 0.4 | 0.33 | 0.24 | 0.12 | 0.01 | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 3 ... 4 | 230/50/14 |
| MS-449F | 0.4 | 0.31 | 0.24 | 0.19 | 0.05 | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 21 ... 30 | 230/50/13 |
| MS-600F | 0.6 | 0.44 | 0.27 | 0.16 | 0.04 | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 5 ... 7.5 | 230/50/16 |
| MS-601F | 0.6 | 0.52 | 0.27 | 0.16 | 0.04 | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 8 ... 10 | 230/50/16 |
| MS-900F | 0.9 | 0.8 | 0.52 | 0.31 | 0.11 | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 21 ... 30 | 230/50/16 |
| MS-1000F | 1 | 0.96 | 0.7 | 0.51 | 0.25 | 0.11 | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 5 ... 7.5 | 230/50/16 |
| MS-1000FW | 1 | 0.96 | 0.7 | 0.51 | 0.25 | 0.11 | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 5 ... 7.5 | 230/50/16 |
| MS-Z | - | - | - | - | - | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | - | 230/50/11 |
| MX-Z | - | - | - | - | - | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | - | 230/50/15 |
| MS-BC4 | - | - | - | - | - | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 3 ... 4.5 | 230/50/11 |
| MX-BC6 | - | - | - | - | - | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 4.5 ... 6 | 230/50/15 |
| MX-BC12 | - | - | - | - | - | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 8.5 ... 12 | 230/50/15 |
| MX-BC26 | - | - | - | - | - | - | ⊕ | 16 ... 31 | 0.24 ... 0.92 | 0.03 ... 0.4 | M16×1 | 19 ... 26 | 230/50/15 |

| Model | External Pt100 sensor connection | Ethernet interface | USB interface | RS232 interface | RS485 interface | Modbus TCP | Analog interface | Usable bath opening W × L / D cm | Dimensions W × L × H cm | Weight net kg |
|-----------|----------------------------------|--------------------|---------------|-----------------|-----------------|------------|------------------|----------------------------------|-------------------------|---------------|
| MS-310F | yes | yes | yes | yes | yes | yes | accessories | 13 × 15 / 15 | 23 × 40 × 65 | 29 |
| MS-450F | yes | yes | yes | yes | yes | yes | accessories | 13 × 15 / 15 | 23 × 40 × 65 | 29 |
| MS-449F | yes | yes | yes | yes | yes | yes | accessories | 28 × 35 / 20 | 37 × 59 × 69 | 42 |
| MS-600F | yes | yes | yes | yes | yes | yes | accessories | 22 × 15 / 15 | 33 × 47 × 69 | 38.3 |
| MS-601F | yes | yes | yes | yes | yes | yes | accessories | 22 × 15 / 20 | 33 × 47 × 74 | 41.5 |
| MS-900F | yes | yes | yes | yes | yes | yes | accessories | 26 × 35 / 20 | 39 × 62 × 75 | 49.9 |
| MS-1000F | yes | yes | yes | yes | yes | yes | accessories | 18 × 13 / 15 | 42 × 49 × 74 | 54.1 |
| MS-1000FW | yes | yes | yes | yes | yes | yes | accessories | 18 × 13 / 15 | 42 × 49 × 74 | 54.1 |
| MS-Z | yes | yes | yes | yes | yes | yes | accessories | - | 34 × 19 × 36 | 7.2 |
| MX-Z | yes | yes | yes | yes | yes | yes | accessories | - | 34 × 19 × 41 | 7.6 |
| MS-BC4 | yes | yes | yes | yes | yes | yes | accessories | 13 × 15 / 15 | 23 × 41 × 42 | 11.1 |
| MX-BC6 | yes | yes | yes | yes | yes | yes | accessories | 13 × 15 / 20 | 24 × 44 × 47 | 12.8 |
| MX-BC12 | yes | yes | yes | yes | yes | yes | accessories | 22 × 15 / 20 | 33 × 49 × 47 | 14.6 |
| MX-BC26 | yes | yes | yes | yes | yes | yes | accessories | 26 × 35 / 20 | 39 × 62 × 48 | 21.4 |

Unless otherwise indicated, all data relates to the operation at nominal voltage and frequency and +20 °C ambient temperature.

Cooling capacity measured according to DIN12876-2. Information regarding used refrigerants can be found under www.julabo.com.

Voltage options

| Model | Order No. | Available mains voltages / heating capacity in kW | | | |
|------------------|---------------|---|---------------------------|----------------|---------------------|
| | | 200 - 230 V 50 - 60 Hz | 100 - 115 V 50 - 60 Hz | 115 V 60 Hz | 100 V 50 - 60 Hz |
| MS-310F | 9 032 713.N1* | 1.6 ... 2 | - | 1 | 0.8 |
| MS-450F | 9 032 714.N1* | 1.6 ... 2 | - | 1 | 0.8 |
| MS-449F | 9 032 716.N1 | 1.6 ... 2 | - | 1 | 0.8 |
| MS-600F | 9 032 704 | 1.6 ... 2 | - | 1 | 0.8 |
| MS-601F | 9 032 705 | 1.6 ... 2 | - | 1 | 0.8 |
| MS-900F | 9 032 706 | 1.6 ... 2 | - | 1 | - |
| MS-1000F | 9 032 707 | 1.6 ... 2 | - | 1 | - |
| MS-1000FW | 9 032 727 | 1.6 ... 2 | - | 1 | - |
| MS-Z | 9 032 201 | 1.6 ... 2 | 0.8 ... 1 | - | - |
| MX-Z | 9 033 201 | 2.3 ... 3 | - | - | - |
| MS-BC4 | 9 032 504 | 1.6 ... 2 | - | 1 | 0.8 |
| MX-BC6 | 9 033 506 | 2.3 ... 3 | - | - | - |
| MX-BC12 | 9 033 512 | 2.3 ... 3 | - | - | - |
| MX-BC26 | 9 033 526 | 2.3 ... 3 | - | - | - |



GERMAN Headquarters

JULABO GmbH
Gerhard-Juchheim-Strasse 1
77960 Seelbach
Germany

Tel. +49 7823 51-0
Fax +49 7823 2491
info.de@julabo.com
www.julabo.com

ITALY

JULABO Italia SRL
www.julabo.com

UK

JULABO UK, Ltd.
www.julabo.com

FRANCE

JULABO France SAS
www.julabo.com

NETHERLANDS

JULABO Nederland B.V.
www.julabo.com

NORTH AMERICA

JULABO USA, Inc.
www.julabo.us

JAPAN

JULABO Japan Co., Ltd.
www.julabo-japan.co.jp

KOREA

JULABO Korea Co., Ltd.
www.julabo-korea.co.kr

CHINA

JULABO Technology (Beijing) Co., Ltd.
www.julabo.com.cn

LATIN AMERICA

JULABO Latin America
www.julabo-latinamerica.com

SINGAPORE

JULABO Singapore Pte., Ltd.
www.julabo.com

INDIA

JULABO India
www.julabo.com

**Plus more than
100 partner distributors
worldwide**